


Motoriduttore CX.60GBE



REDUCTION RATIO	L	REDUCTION RATIO	L
1/3~1/4	43.3	1/150~1/676	89.8
1/12~1/19	58.8		
1/43~1/113	74.3		

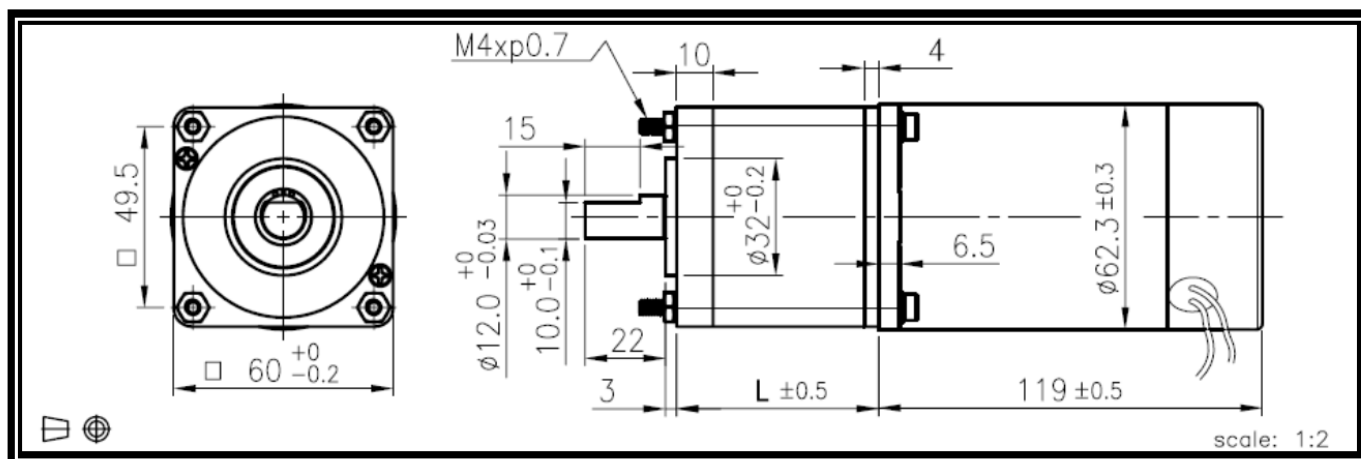

GEARED MOTOR TORQUE/SPEED

	減速比 Reduction ratio	1/3	1/4	1/12	1/15	1/19	1/43	1/53	1/66	1/81	1/100	1/113	1/150	1/230	1/285	1/353	1/488	1/546	1/676		
12V	定格扭力(Kg-cm) Rated torque	1.9	2.4	6.0	7.4	9.0	18	22	27	34	42	47	52	80	99	100	100	100	100		
	定格回轉數(rpm) Rated speed	1350	1090	385	310	250	110	89	72	58	47	42	31.5	20.5	16.5	13.6	9.8	8.9	7.2		
24V	定格扭力(Kg-cm) Rated torque	2.7	3.4	8.5	10.5	13	25	31	39	48	60	67	75	100	100	100	100	100	100		
	定格回轉數(rpm) Rated speed	1380	1100	390	310	255	110	90	73	59	48	42	32	21	17.1	13.8	10	9.0	7.3		

馬達單體型式 / MOTOR DATA

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格回轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷回轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	700	4760	≤ 3300	5100	≤ 1500	34.2	1050
24	1000	4830	≤ 2400	5100	≤ 800	49.6	1050

馬達單體特性圖 / MOTOR CHARACTERISTICS

