


Micromotors CX.KC360 Series

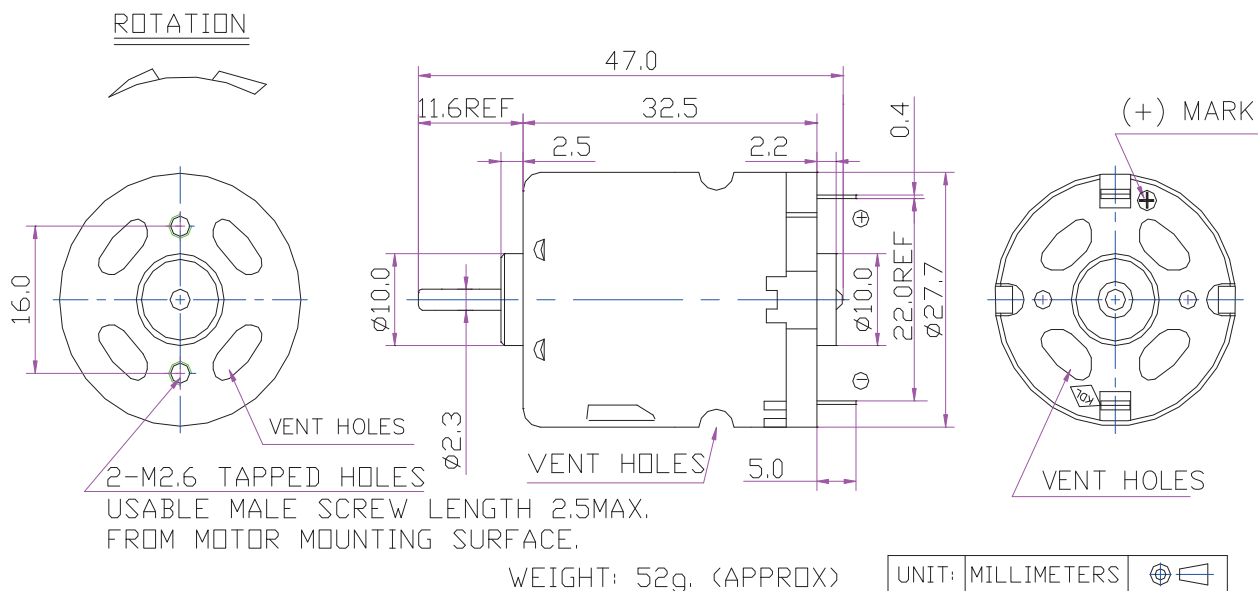

PMDC Carbon-brush Motor (KC360SH type with metal end-cap is also available)

Model	Voltage		No Load		At Maximum Efficiency					Stall	
	Operating Voltage	Nominal (Constant)	Speed rpm	Current A	Speed rpm	Current A	Torque g-cm	Output W	Eff. %	Torque g-cm	Current A
CX.KC360S-5022	1.2-5.0	3.6	22200	1.30	18514	6.53	69.7	13.2	56.3	420	32.8
CX.KC360S-3548	2.4-9.0	9.0	25000	0.80	20696	3.85	89.5	19.0	54.9	520	18.5
CX.KC360S-3353	3.6-7.2	6.0	16500	0.60	13627	2.85	72.3	1.10	59.1	415	13.5
CX.KC360S-3165	1.2-6.0	2.4	5000	0.30	4008	1.21	37.7	1.55	53.2	190	4.7
CX.KC360S-3165	1.2-6.0	3.6	8500	0.39	6877	1.65	50.6	3.57	60.0	265	7.0
CX.KC360S-2985H	3.0-12.0	5.0	8600	0.27	7158	1.34	57.0	4.19	62.5	340	6.7
CX.KC360S-2885	3.0-9.0	7.2	12750	0.33	10660	1.69	59.0	6.45	53.2	360	8.0
CX.KC360S-25110	3.0-13.5	6.0	8350	0.22	6914	1.06	55.0	3.90	61.4	320	5.1
CX.KC360S-14270	7.2-30.0	12.0	6500	0.085	5196	0.34	42.7	2.28	56.0	213	1.35
CX.KC360S-12350	7.2-30.0	12.0	5200	0.065	4047	0.23	33.3	1.38	50.5	150	0.80
CX.KC360S-10500	9.0-30.0	12.0	3500	0.055	2593	0.157	31.1	0.80	43.8	120	0.45
CX.KC360S-10500	9.0-30.0	24.0	7200	0.06	5682	0.22	48.5	2.83	52.5	230	0.84
CX.KC360S-09600	9.0-35.0	12.0	2800	0.045	1994	0.11	24.5	0.5	37.5	85	0.275
CX.KC360S-09600	9.0-35.0	24.0	5700	0.060	4285	0.182	44.7	1.96	45.0	180	0.55
General Test Tolerance			± 15%								